


ADDENDUM NO. 1
WASTEWATER TREATMENT PLANT IMPROVEMENTS
CONTRACT 17-01
INFLUENT FORCEMAIN REPLACEMENT
SAVANNAH, TENNESSEE
WAUFORD PROJECT NO. 3642

Date of Addendum: Monday, March 12, 2018
Bid Opening: Friday, March 23, 2018, 10:00 A.M. Central Time

1. PLANS, Sheet 1:

The existing 16-inch forcemain that is not removed shall be filled with grout. Once the two blind flanges are installed on the submerged tee the entire length of 16-inch forcemain will be grouted back to the plug shown to be installed downstream of the flowmeter structure. This 550' of grouting shall be included in the contractors price including all materials, labor and incidentals to fully grout the forcemain.

J. R. WAUFORD & COMPANY,
CONSULTING ENGINEERS, INC.

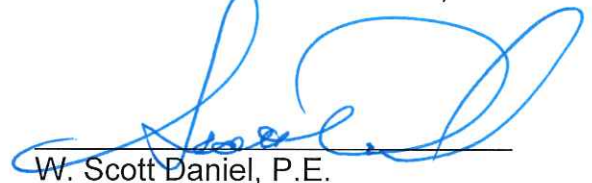

W. Scott Daniel, P.E.

Tennessee License No. 104425